



SCOPE OF WORK

- Strip tiles & sort for reuse, dressing down partially damaged tiles.
- Strip battens. Denail rafters.
- Allow provision for rafter repairs as needed.
- Relead gutters in 8lb sand cast lead.
- 100mm sarking grade woodfibre boards.
- New 25x32mm treated softwood counter battens.
- New 25x32mm preservative treated softwood battens.
- Retile on aluminium pegs, making up numbers in new sandstone tiles.
- Rebed and point the ridges.
- New Code 5 lead abutment flashings & Code 4 soakers.
- Repair lath & plaster between rafters.
- Redecorate walls internally in 4 coats limewash.




- PHASE 3
- SCAFFOLDING
- RELEAD GUTTERS
- TEMPORARY ROOF
- MANSAFE CABLE
- * NEW FIXED LADDER

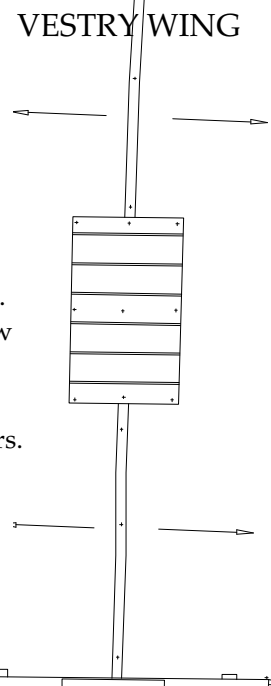

Revisions:

This drawing is the copyright of Oliver Architecture Ltd.
 All dimensions are to be checked on site prior to commencing work.
 Scaled dimensions should not be taken from this drawing unless stated.
 Dimensions of new work are to be adjusted to suit the existing building as necessary.
 The contractor must not assume that the existing building is plumb, square or level.
 Prior to commencing work, all discrepancies are to be reported to the Architect.



OLIVER ARCHITECTURE LTD.
 The Coffin Works, 13-15 Fleet Street,
 Jewellery Quarter, Birmingham B3 1JP
 T: 0121 773 5002
 W: www.oliver-architecture.co.uk

Project	Brecon Cathedral	Scale 1:200 @ A3	Job No. 2311
	NLHF Development Phase		
	Date Jan 2024		
Drawing	Roof Plan, Repair Phase 3	Drawn mj	Rev. -